
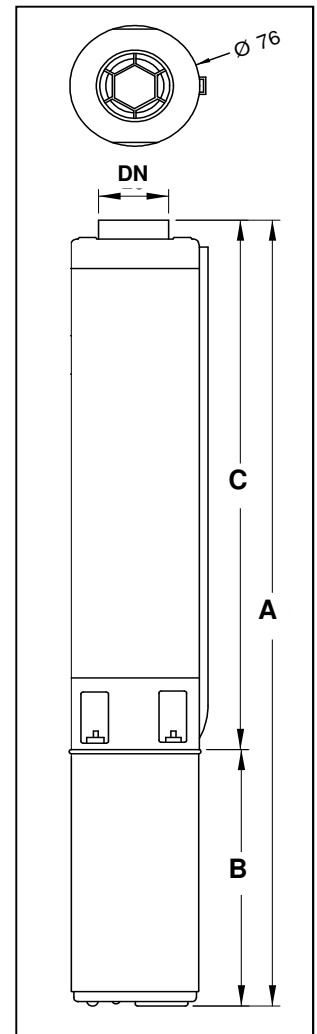


50 Hz - 2850 rpm

Tested according ISO 9906

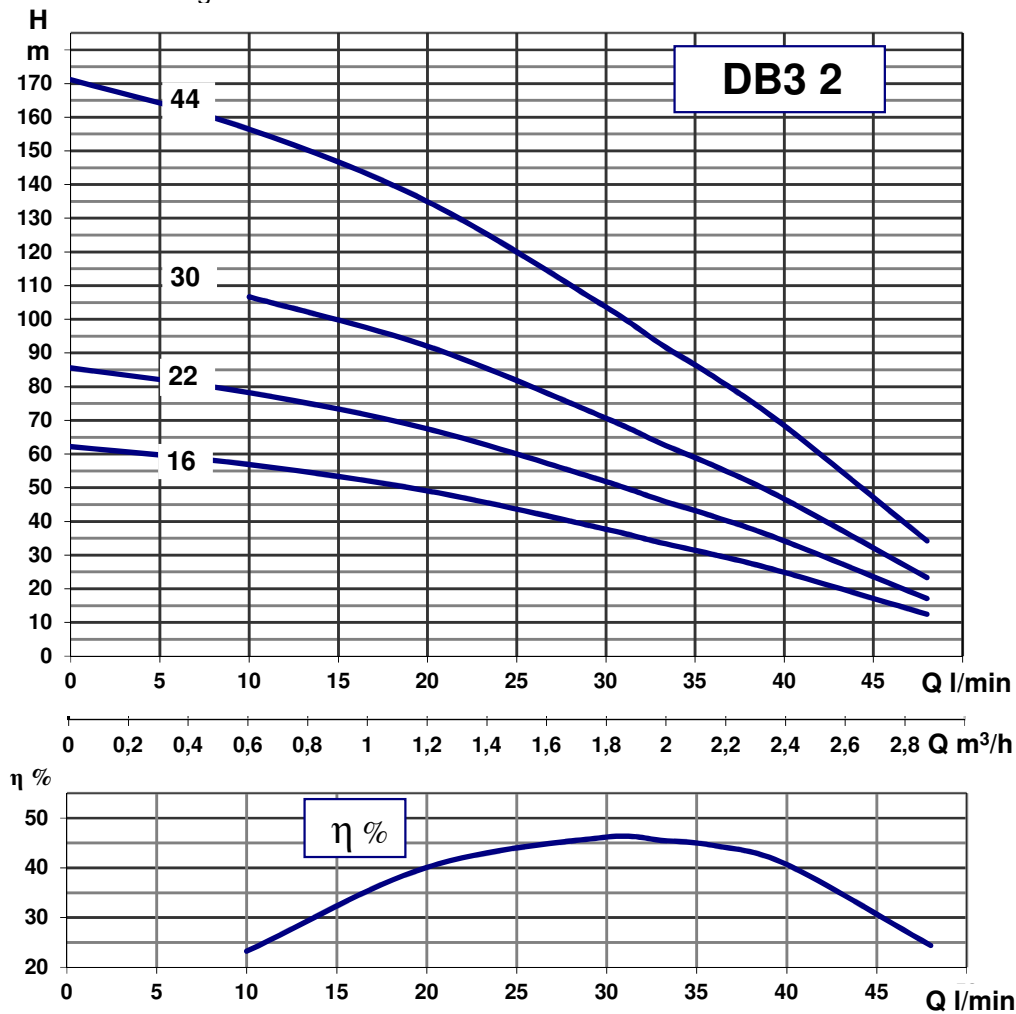

50 Hz - 2850 rpm

MODEL	50 Hz	MOTOR		CAPACITOR		Q - Flow								DIMENSIONS			
		kW	A	uF	V	m³/h	0	0,6	1,2	1,8	2	2,2	2,4	2,9	A	B	C
DB3 2/16M	1~220/230	0,37	3,8	16	450	62	57	49	38	34	30	25	12	923	377	546	1" 1/4
DB3 2/16T	3~220/230 3~380/415		3,5 2,0			923	377										
DB3 2/22M	1~220/230	0,55	4,5	20	450	86	78	67	52	46	42	34	17	1075	397	678	1" 1/4
DB3 2/22T	3~220/230 3~380/415		3,7 2,1			1055	377										
DB3 2/30M	1~220/230	0,75	5,9	25	450	117	107	92	71	63	57	47	23	1270	416	854	1" 1/4
DB3 2/30T	3~220/230 3~380/415		4,4 2,5			1251	397										
DB3 2/44T	3~220/230 3~380/415	1,1	5,6 3,2			171	156	135	104	93	83	68	34	1619	416	1203	1" 1/4