

Pumps PL

SMALL PUMP FOR OUTSTANDING RESULTS!



High-performance. Silent operation. Above-ground and in-ground pools up to 68 m³. Wide range.



ASSETS

- High-performance for everyone. Incomparable quality for an unbeatable price! A compact pump that will meet all your needs.
- Silent operation. Produces no noise disturbance.
- Ideal for small pools and above-ground pools up to 68 m³.
- Prefilter size: 1.1L.

IDEAL FOR SMALL AND MID SIZE POOLS

- Easy maintenance thanks to its transparent cover and large strainer.
- Winterize your pump in a single movement using its drain plug.
- Easy installation (fittings included with the pump).
- Compatible with water treatment by salt chlorination.
- Pump shaft in stainless steel.
- 50 mm outlet and ø 32/38 mm fluted adapters.
- **Power cable included**
- Self-priming pump with fully enclosed, ventilated engine.
- Wide range available, single-phase 0.25 to 1.5 HP.





- 50 mm outlet and ø 32/38 mm fluted adapters.
- Easy-open strainer thanks to its twist-lock cover.
- Drain release plug for easy winterizing.



| Item | Type HP | Total length A (mm) | Weight (Kg) | I/O (mm) | Flow Rate* (m ³ /h) | P1 Max (W) (Maximum consumption of the pump) | Nominal power of the motor (W) | Amps at P1 Max (A) | Quantity per pallet |
|-----------------------------|---------|---------------------|-------------|--------------|--------------------------------|--|--------------------------------|--------------------|---------------------|
| SINGLE PHASE PUMP PL | | | | | | | | | |
| 81002E2 | 0.25 | 504 | 7.9 | 50 and 32/38 | 6.5 | 360 | 235 | 1.6 | 32 |
| 81003E2 | 0.33 | 504 | 7.9 | 50 and 32/38 | 6.25 | 460 | 330 | 2 | 32 |
| 81004E2 | 0.5 | 504 | 8.8 | 50 and 32/38 | 9.71 | 580 | 440 | 2.6 | 32 |
| 81005E2 | 0.75 | 504 | 9.8 | 50 and 32/38 | 13 | 730 | 585 | 3.2 | 32 |
| 81006E2 | 1 | 504 | 9.8 | 50 and 32/38 | 15 | 860 | 690 | 3.8 | 32 |
| 81007E2 | 1.5 | 540 | 12.3 | 50 and 32/38 | 18.75 | 1 050 | 860 | 4.6 | 32 |

* 8 m water column pressure, except for 81002E2, given at 6 m water column pressure

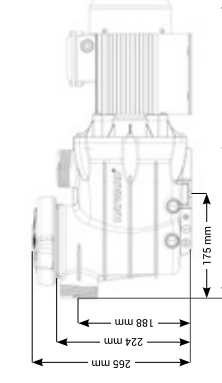

Technical Specifications

| | |
|-------------------------------|---|
| Max. water temp. | 35°C |
| Adapter | 32/38 mm |
| Mechanical seal | ANSI 304 S, compatible with salt treatment (salt chlorinator) |
| Motor specifications | Class F, IP55, 50Hz, 2 Poles |
| Housing/impeller/strainer/lid | PP-GF/Noryl® + GF/ABS/PC |
| Prefilter size | 1.1L |

