



Solid fuel products
SERIES LTC300





Series LTC341
Series LTC361
Series LTC381





CE

LVD 2014/35/EU
EMC 2014/30/EU
RoHS 2011/65/EC
PED 2014/68/EU, article 4.3

ErP 2009/125/EU
ErP 2015


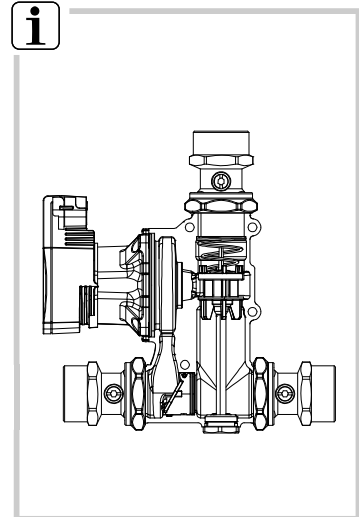



Mtrl.n: 9814 1077 • Rit.n: 4843 vers. A • Rev. 2020-12-01


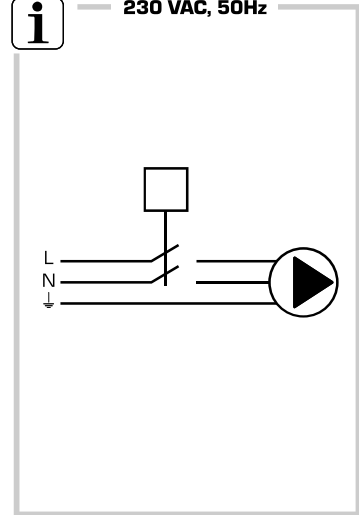
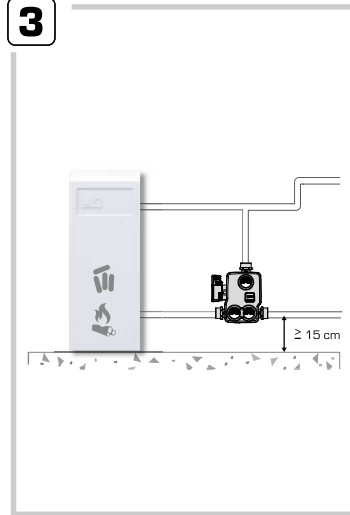
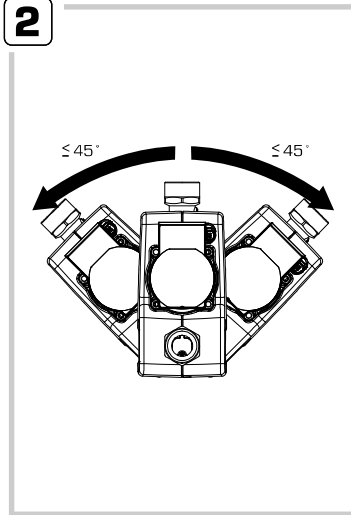
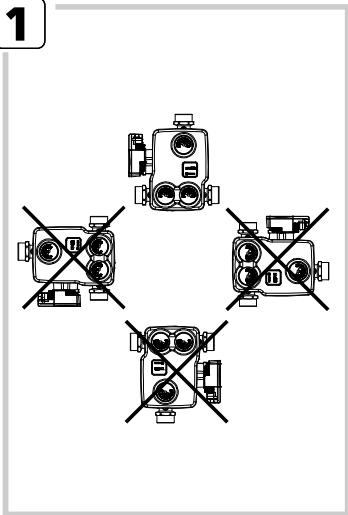


4

a



b

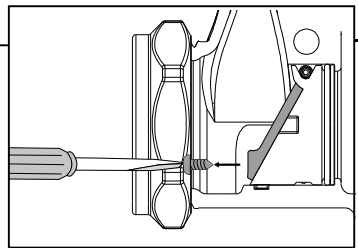


5

Pump Settings

	Click	LED display	Control mode	Pump curve
				Recommended
1	↓	☐ ☐ ☐	Constant speed	🔥
2	↓	☐ ☐ ☐	Constant speed	🔥
3	↓	☐ ☐ ☐	Variable differential pressure $\Delta p-v$	
4	↓	☐ ☐ ☐	Variable differential pressure $\Delta p-v$	
5	↓	☐ ☐ ☐	Variable differential pressure $\Delta p-v$	
6	↓	☐ ☐ ☐	Constant differential pressure $\Delta p-c$	
7	↓	☐ ☐ ☐	Constant differential pressure $\Delta p-c$	
8	↓	☐ ☐ ☐	Constant differential pressure $\Delta p-c$	
9	↓	☐ ☐ ☐	Constant speed	🔥

6

Display

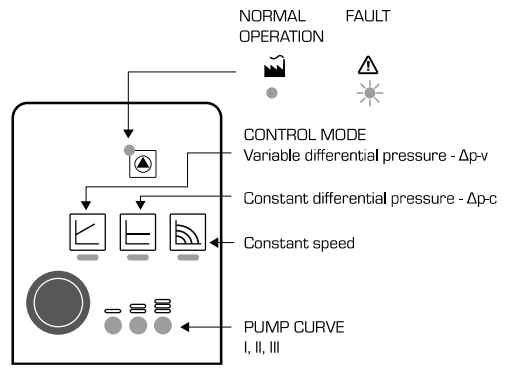

i


Pump features

	1	2	3	4
	Hold	LED display	Last settings	Status
↓ 8 sec	☐ ☐ ☐	☐ ☐ ☐	☐ ☐ ☐ 1 sec	Locked 🔒
↓ 8 sec	☐ ☐ ☐	☐ ☐ ☐	☐ ☐ ☐ 1 sec	Unlocked 🔓
↓ 4 sec	☐ ☐ ☐ 1 sec	☐ ☐ ☐ 1 sec	☐ ☐ ☐ 1 sec	Factory setting 🏭
↓ 3 sec	☐ ☐ ☐ 10 min	☐ ☐ ☐	☐ ☐ ☐	Venting 🌬️ air


7




Optimising load temperature

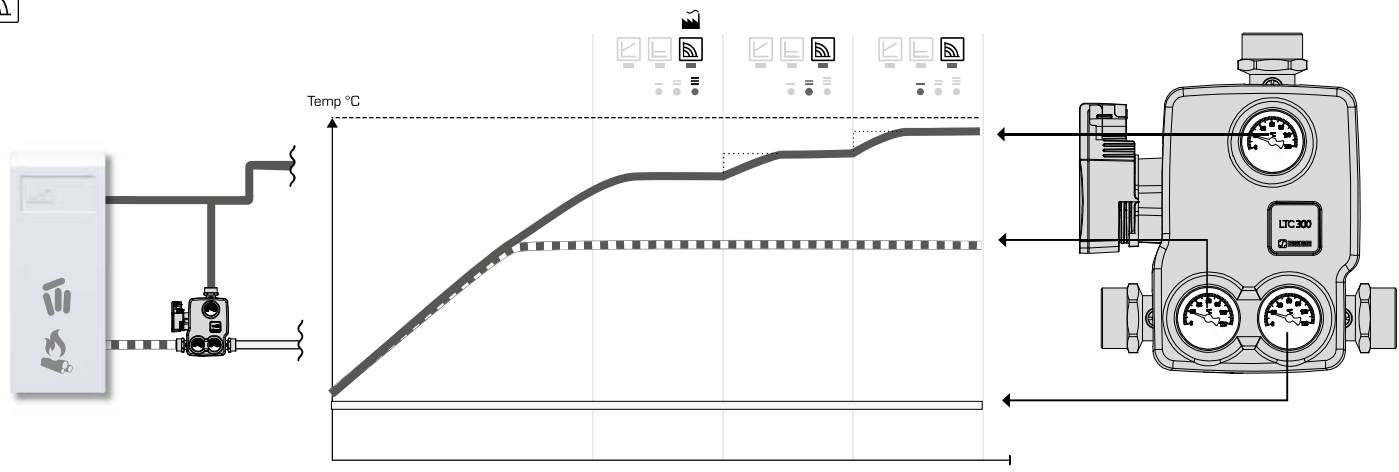

i



i



Piping Schematics are General Representations

i



<https://www.esbe.eu/global/en/products/solid-fuel-products>

i



www.esbe.eu